


Features

Engine	Perkins
Type	1103A-33G
Origin	UK
No. of Cylinders	3
Configuration	In-line
Cycle	4-stroke
Bore, mm	105
Stroke, mm	127
Displacement, l	3.3
Compression ratio	19.25:1
Aspiration	Naturally
Injection	Mechanical
Starting	12V Electric
Alternator, amps	24/12V

Alternator	Stamford
Type	PI144F
Origin	UK
Construction	single bearing
Insulation system	Class "H"
Temperature rise, °C	125
Excitation	Self Excited
Voltage Regulator	A.V.R SX480
Protection	IP23
Rated power factor	0.8
Regulation	±1%
No. of Phases	3
No. of Poles	4
RPM	1500 1800
Frequency	50Hz 60Hz

Performances	1500rpm
Engine	
Efficiency	
Prime Power, KWm (hp)	27.7 (37.1) 32.2 (43.2)
Standby Power, KWm (hp)	30.4 (40.8) 35.4 (47.5)

Fuel system	1500rpm
Specific fuel consumption at:	
Prime Power, Litre/h	
50%	3.8 (1.0)
75%	5.7 (1.5)
100%	7.6 (2.0)

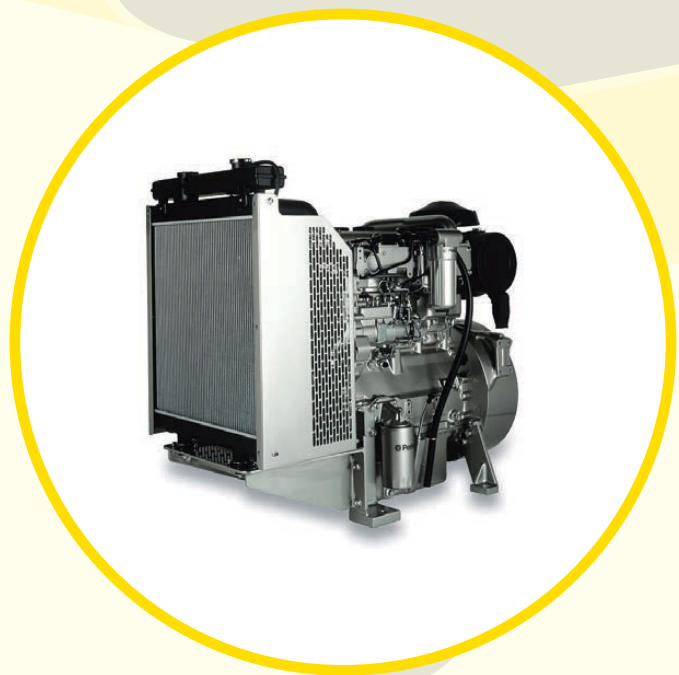

GENERATING SET POWERED BY PERKINS

SP27- GENSET

Circuit Breaker	
3Pole series MCCB adjustable, amps	40
CT's	40/5
Steel sheet enclosure with bolted cover (European origin, ABB or equivalent)	

Documentation	
Engine instruction book-English	
Warranty and service book- Multi-language	
Alternator manual- English	
Wiring diagram	

Dimensions and Weight	
Length	1029 mm (40.5 in)
Width	629 mm (24.8 in)
Height	951 mm (37.4 in)
Weight.....	412 kg (908 lb)

Spare Parts Kit (Optional)	(Genuine Perkins)
Oil filter, full flow	
Oil filter, bypass	
Fuel filter	
Fuel filter water separator	
Coolant filter	
Air filter	
Fan belt set	
Alternator belt set	
Engine Oil	

International Standards	
Engine conform to ISO 9001: 2000, ISO 14001, ISO10054, ISO 3046, BS 5514, DIN 6271.	
Alternator conform to ISO 9001, ISO 14001, BS EN 60034, BS 5000, VDE 0530, NEMA MG1-32, IEC34 CSA C22.2-100, AS 1359, BS 6861-1, B En 61000-6-2:2001.	

Rating Guidelines	
PRIME POWER rating to ISO Standard Power for continuous operation. It is applicable for supplying electrical power at variable load with 70% load factor for an unlimited number of hours as opposed to commercially purchased power. A 10% overload capability for governing purpose is available for this rating.	
MAXIMUM STANDBY POWER rating corresponds to ISO Standard Fuel Stop Power. It is applicable for supplying standby electrical power at variable load in areas with well established electrical networks in the event of normal utility power failure. No overload capability is available for this rating.	
1 hp = 1KW x 1.36	
KWm = Kilo Watt mechanical, net with fan	
KWe = Kilo Watt electrical = KWm*gen.eff	
KVA = Kilo Volt Ampere calculations based based on 0.8 power factor = KWe/0.8	

Optional Equipment
• Engine
-Water heater jacket
-Oversize batteries
-Extra fuel pre filter water separator
• Alternator
-12 wire reconnectable stator / Terminal arrangement
-Upgrade to AVR MX321
-Quadrature droop kit
-Anti-condensation heater
-Air inlet filters
• General
-Upgrade to modular controller for paralleling.
-Automatic transfer switch
-Battery charger
-Upgrade to 4 pole ACB
-Fuel tank base frame integrated for 8 hours operation
-Fuel tank separate with customized capacity and shape
-Fuel level switch High / Low for alarm and control
-Fuel transfer pump Automatic / Manual
-Fuel tank air filter
-Residential grade silencer
-Weather protective and acoustic enclosure.